


Item	Date	Remark
A	20080910	Original Drawing
B	20090120	Change FPC & Modify Pin Definition

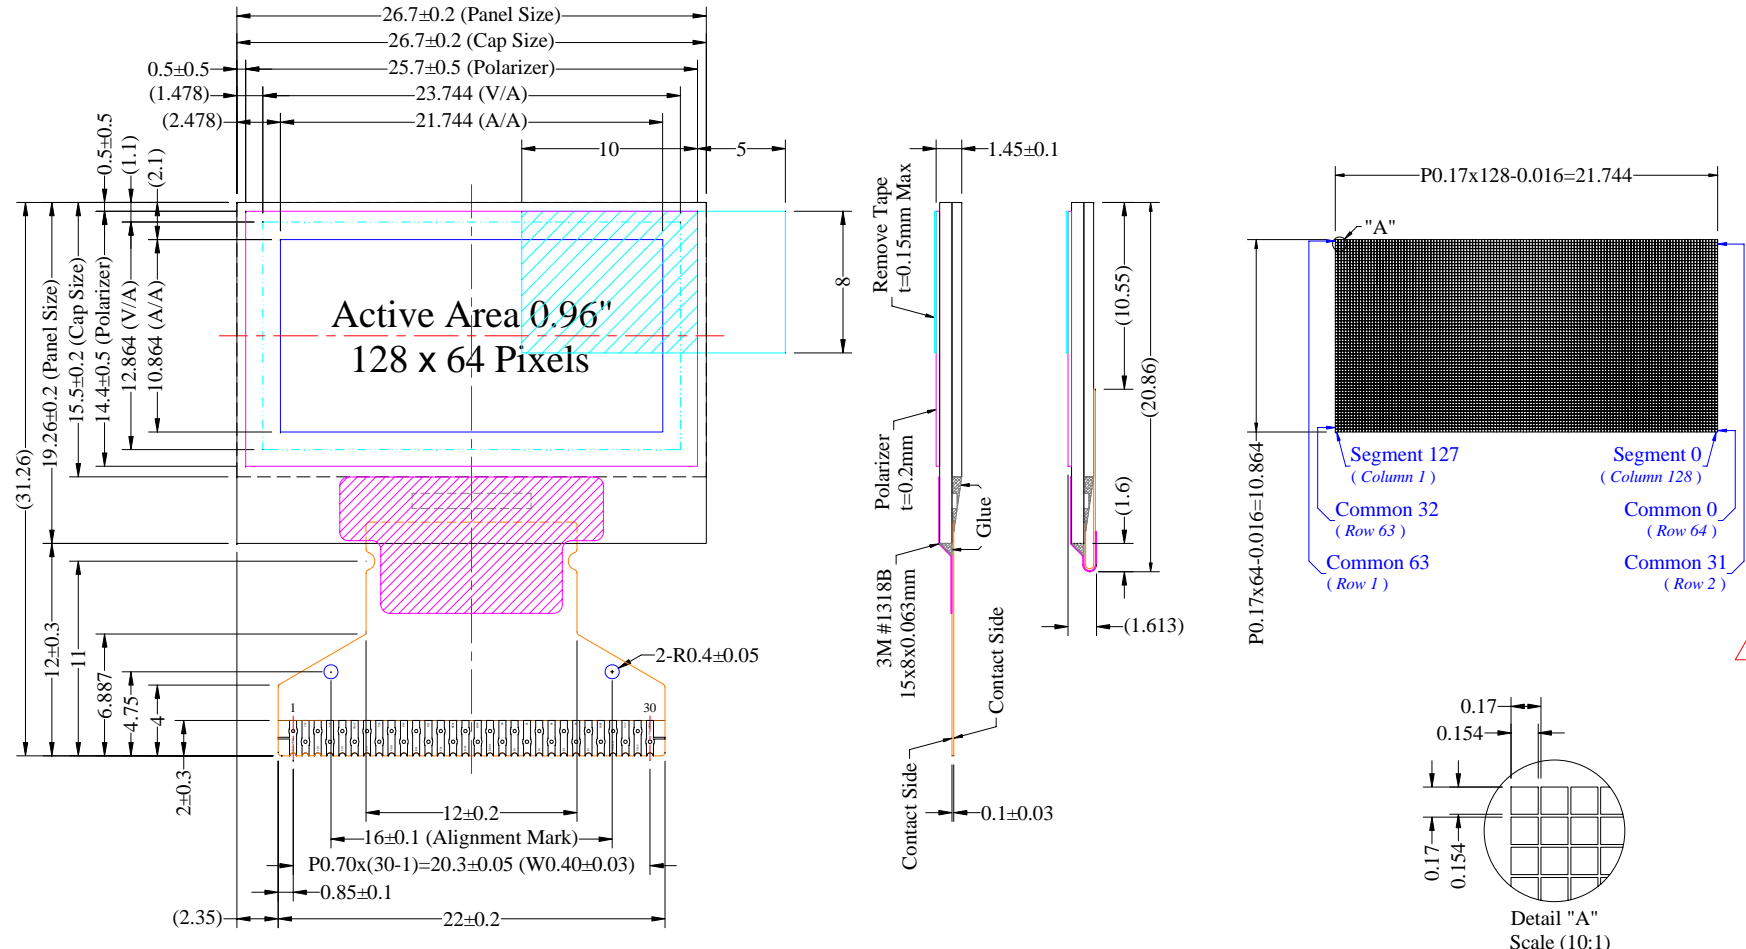

Pin	Symbol
1	N.C. (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	N.C.
8	VSS
9	VDD
10	BS0
11	BS1
12	BS2
13	CS#
14	RES#
15	D/C#
16	R/W#
17	E/RD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	VCOMH
28	VCC
29	VSSS
30	N.C. (GND)

Notes:

- Color: White
- Driver IC: SSD1306
- FPC Number: UT-0206-P05 △ B
- Interface:
8-bit 68XX/80XX Parallel, 3-/4-wire SPI, I2C
- General Tolerance: ±0.30
- The total thickness (1.55 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 1.80 Max.

Customer Approval Signature		Univision Technology Inc.						Drawing Number		Rev.	
		UG-2864HSWEG01 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package						DMX2864SDGF46		B	
		Title		Material				Soda Lime / Polyimide			
		Unit		Drawn		E.E.		Panel / E.		P.M.	
		General Roughness		By		James Wang		Ivy Lo		Cherry Lin	
		Tolerance		Date		20090120		20090120		20090120	
		Dimension		Scale		1:1		Sheet		1 of 1	
		Angle		Size		A3					